



REDUCED  
AIRING TIME -  
SPEEDS UP  
INSTALLATION



**ARDEX AF 145**  
PRESSURE  
SENSITIVE  
ADHESIVE

# PRESSURE SENSITIVE ADHESIVE



- Ready to receive floorcoverings in as little as 20 minutes
- Can receive vinyl sheet up to 80 minutes after airing
- Excellent early and long term adhesive strength
- Can also be used as a wet bond adhesive
- High temperature resistance, suitable for use over underfloor heating systems
- Solvent free
- Covers up to 56m<sup>2</sup>




ARDEX Flooring Adhesives meet the requirement guidelines for the EMICODE licence, achieving the lowest possible, or very low emission limits.

Suitable for:

- ✓ Vinyl Composition Tiles
- ✓ Cushioned Vinyl
- ✓ Luxury Vinyl Tiles
- ✓ Vinyl Sheet

## INSTALLATION SCHEDULE

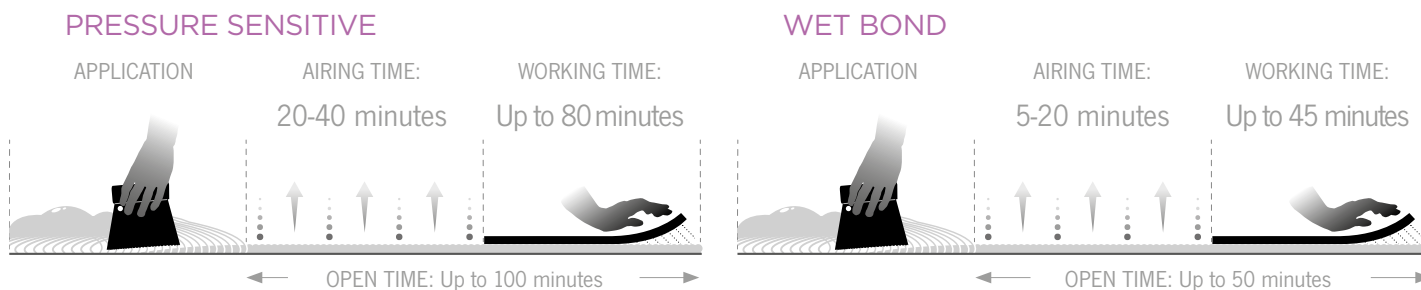

Times dependent on the absorbency of the subfloor and site conditions.

## LEGEND

### AIRING TIME

The time the adhesive must be left open before applying the floorcovering.

### WORKING TIME

The time in which the adhesive can receive the floorcovering, after the initial airing time.

### OPEN TIME

The combination of airing and working time.

ARDEX AF 145 is part of the ARDEX Flooring Adhesive range, for further information or to view our Technical Data-sheets please visit [www.ardex.co.uk](http://www.ardex.co.uk)



[www.ardexbuildingproducts.ie](http://www.ardexbuildingproducts.ie)

Telephone: +353 (1) 880 9210 - Technical Support Hotline: +353 86-1422952

Contact us via e-mail [info@ardex.ie](mailto:info@ardex.ie)